



1	2	3	4	5	6
T/NO.	T1:WUM(A)-01	T2:WUM(MINI A)-01	T3:WT(3)-06	REV	DESCRIPTION
				DATE	APPROVED

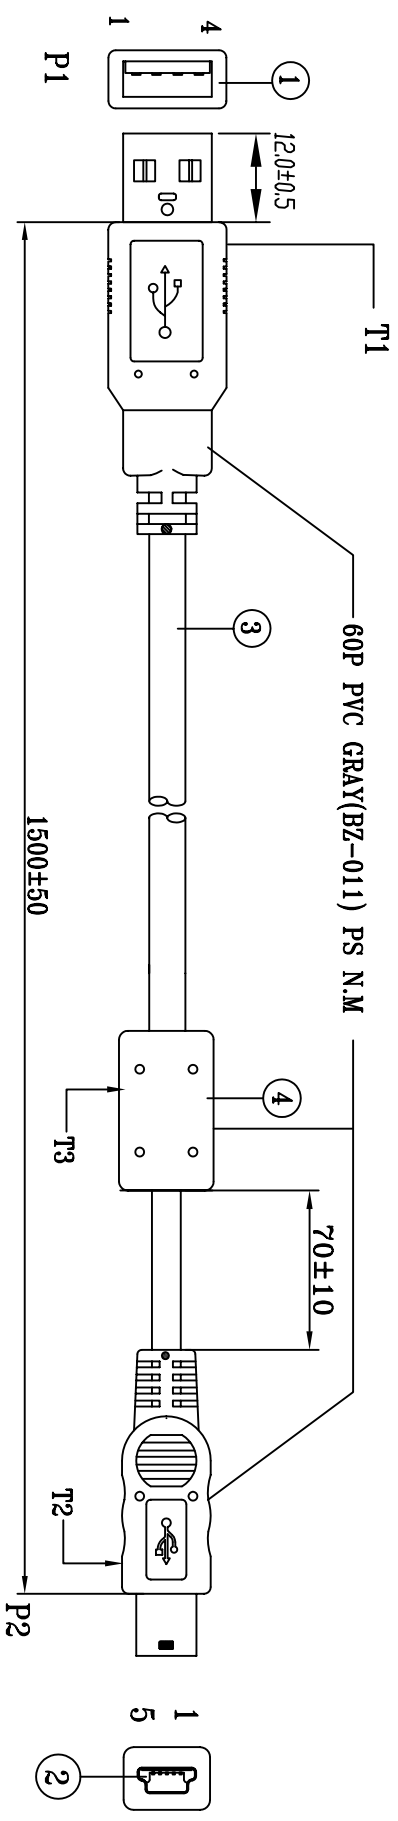

**SPECIFICATION**

- 1.USB CONN: A TYPE MALE SOLDER WHITE FRONT SHELL:NI-PLATED PIN u=30°(V2.0)
- 2.MINI USB:5P BLACK INSULATOR NI-PLATED PIN G/F
- 3.CABLE:UL CM 28AWG\*1P+28AWG\*2C+AL+DRAIN+BRAID OD=3.8mm GRAY(BZ-011)(V2.0)PS N.M L=1500mm
- 4.FERRITE CORE:OD\*1\*D:12\*20\*5.6
- 5.PE TIE: L=120mm WHITE SINGLE SIDE WITH FERRICO



**NOTE:**  
 环保要求: (客户要求)  
 Cd<5ppm(EN1122)  
 Pb<90ppm(EPA3050B)  
 用无铅锡丝进行焊接

**WIRE LIST**

P1	WIRE COLOR	P2
1	RED(28AWG)	1
2	WHITE(28AWG)	2
3	GREEN(28AWG)	3
4	BLACK(28AWG)	5
5	BRAID+DRAIN	SHELL

**BizLink**  
 INTERNATIONAL S.

DRAWN BY: DATE  
 CHECKED BY: DATE  
 APPROVED BY: DATE

TITLE	USB CABLE
PART NUMBER	C4-0376ABI-2
DRAWING NUMBER	
TOLERANCES UNLESS NOTED:	
UNITS:	mm
SCALE:	NONE
REV.:	S0
SIZE:	A4
SHEET:	1/1

Q'TY

1SET

1SET

1

1

1

1