


5.4 LVDS cable

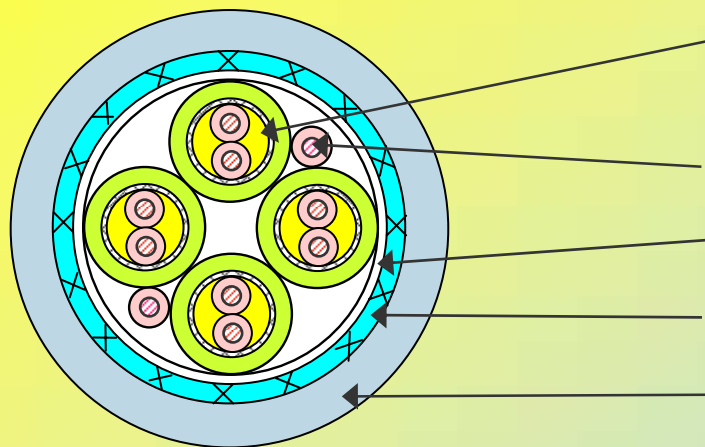

Twisted pair with shielding and jacket
for LVDS : 28AWG

Insulated core : 28AWG

Bind tape

Shielding

Sheath

* LVDS ; Low Voltage Differential Signaling

Description	UL20276-SX
Characteristic impedance	100 ± 10
SKEW	Max.100ps/m
Sheath diam.	8.4mm